

# SAAFCarb™ MC

## ENGINEERED CHEMICAL MEDIA

- Provides targeted chlorine removal
- Compatible for use in all carbon-based air filtration systems
- Low pressure drop and high adsorptive capacity

### Engineered Media

SAAFCarb MC engineered gas removal chemical media is designed to efficiently remove specific gaseous contaminants from airstreams. The main target contaminant is chlorine.

SAAFCarb MC engineered media is an impregnated activated carbon specific for the removal of chlorine. The base material includes select grades of bituminous coal chosen for superior physical properties.


### Chemisorptive Process

The SAAFCarb MC media chemisorptive process removes the impure gases by adsorption, absorption, and chemical reaction. In this process, the gas is trapped within the pellet, where a chemical reaction changes the gases into harmless solids and thereby mitigates the possibility of desorption.

### Quality Control

SAAFCarb MC media undergoes the following quality control tests:

- Apparent Density
- Ball-pan Hardness
- Moisture Content
- Pellet Diameter

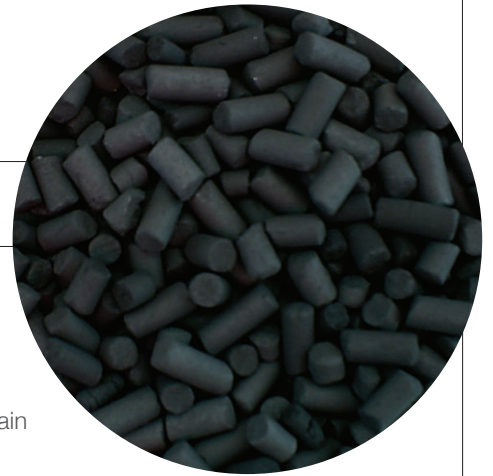

# SAAFCarb™ MC Media

## Typical Properties

Apparent density:	510 kg/m <sup>3</sup> acc. ASTM D2854
Carbon description:	Impregnated
CTC (base carbon):	>65 wt % min
Hardness:	95% minimum
Nominal diameter:	3 mm
Shape:	Cylindrical pellet

*Disclaimer: Typical properties are produced using AAF and industry standard test methods. They are listed for informational purposes only and are not to be used as purchase specifications. Certificates of analysis are available for specific batches upon request.*

## Packaging Options and Application Guidelines

### Packaging Options

SAAFCarb MC media is packaged in one cubic foot containers and 1,100 lb. (499 kg) super sacks.

### Application Guidelines

SAAFCarb MC media performs under the following application guidelines (actual capacities and efficiencies may vary):

- Temperature: -20° to 55 °C
- Humidity: 10% – 95% RH
- Airflow: From 40 m<sup>3</sup>/h to over 170.000 m<sup>3</sup>/h
- Velocity: From 0,30 to 2,5 m/s

## Installation and Disposal Requirements

### Installation

The installers must use dust masks, safety goggles, and rubber gloves.

### Disposal

The spent SAAFCarb MC media must be disposed of according to local and federal guidelines. MSDS included in each shipment.

## Safety

Wet activated carbon adsorbs atmospheric oxygen, causing low oxygen supply in enclosed areas or packed containers. This can be potentially hazardous for workers who enter these oxygen-depleted areas. Make sure that workers adhere to the provincial and state safety guidelines.



AAF International  
European Headquarters  
Robert-Bosch-Straße 30-32, 64625 Bensheim  
Tel: +49 6251 80368 – 0, Fax: +49 6251 80368 – 20  
aafintl.com

AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

©2017 AAF International  
and its affiliated companies.

ISO Certified Firm GPF\_710\_EN\_052017